
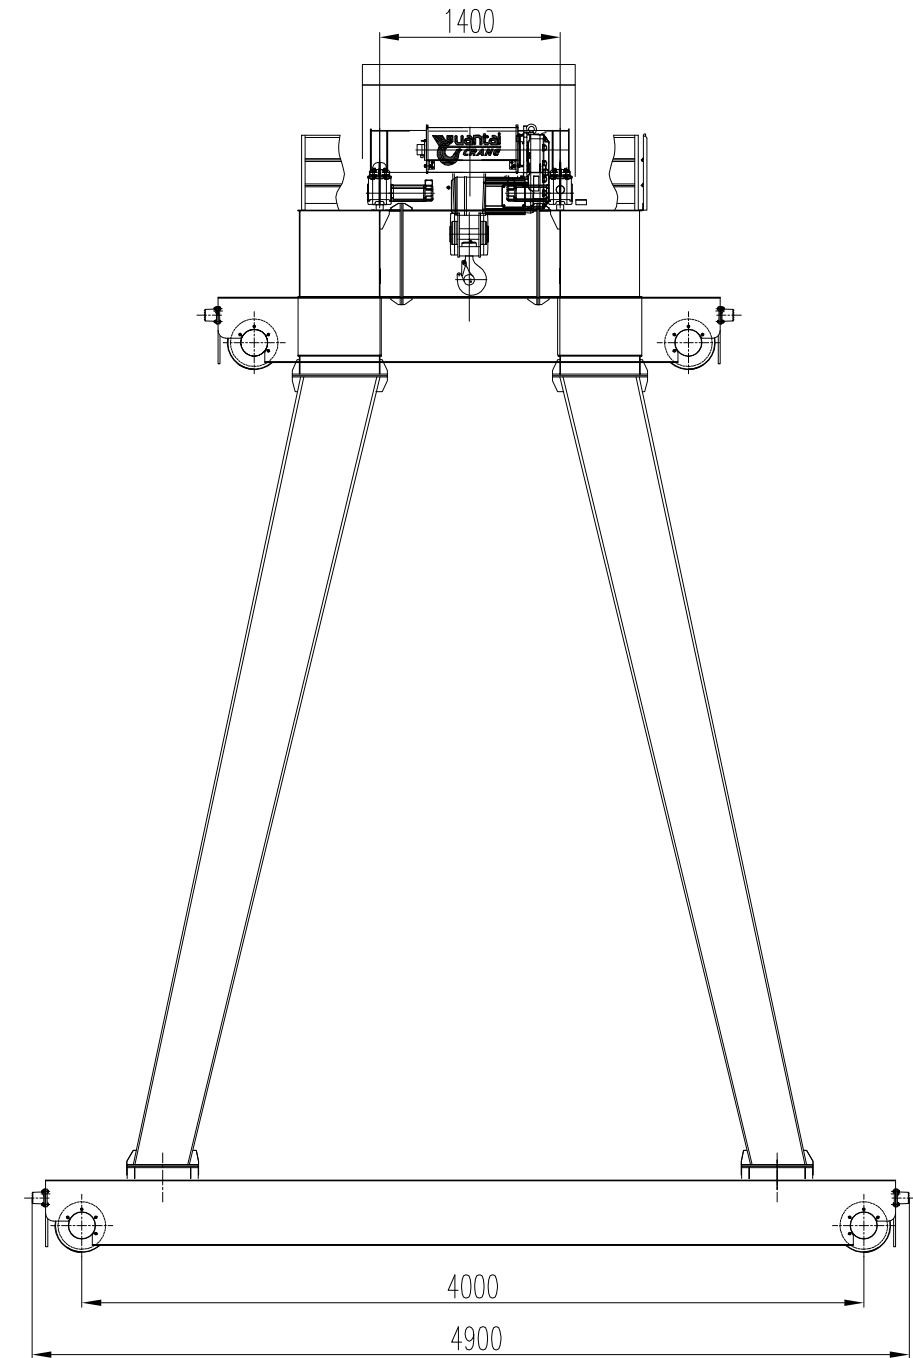


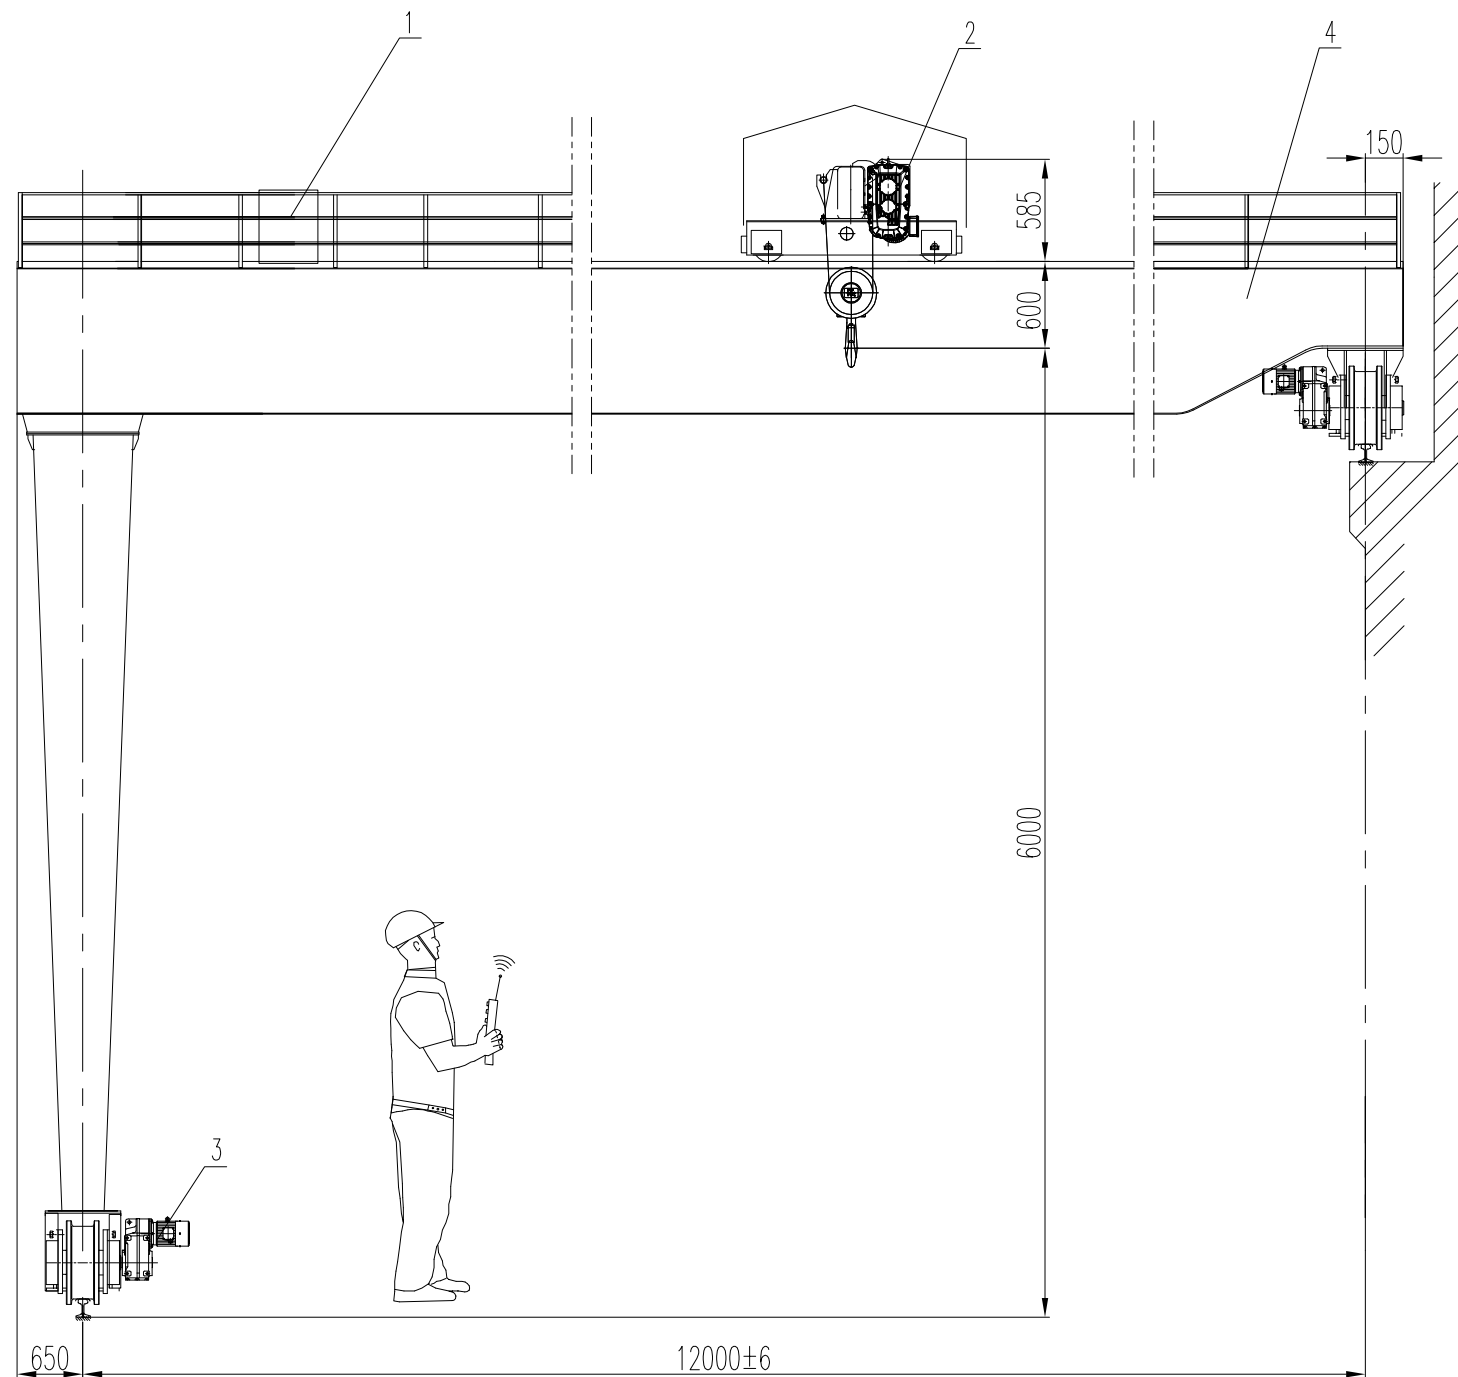

Note:

1. Control mode: pendent control & remote control

Main technical parameters

Mechanism name Item		Lifting	Mechanism Item name		Traveling	
					Trolley	Crane
Lifting capacity	t	12	Track gauge	m	1.4	12
Lifting speed	m/min	0.7~4.0	Traveling speed	m/min	2.0~20	2.0~20
Lifting motor	kW	9.5	Traveling motor	kW	2*0.75	2*1.5
Working duty		M5	Working duty		M5	M5
Lifting height	m	6.0	Cuisine stroke	mm	40	120
Ambient temperature	-10°C~+40°C		Max. Wheel load	KN		93.6
Power supply	3P 220V 60HZ		Type of rail			P30

4		Semi-gantry frame		Subassembly	1			
3		Long travel mechanism		Subassembly	1			
2		Trolley		Subassembly	1			
1		Power supply		Subassembly	1			
Part Number	Drawing number	Description		Material	Qty	Single Weight (kg)	Total Weight (kg)	Remarks
Amended Mark	Qty	Zone	Amended file	Signature	Date	BMGO Double Girder Semi-gantry Crane BMGO 12t-12m A5 General layout		
Designed by			Standardized by					
Drawn by			Electrical Designer					
Checked by			Reviewed by					
Quality Assurance			Approved by					
						Yuantai Crane Machinery Sheet 1 of 1 Weight 9.6t Scale Not In Scale Drawing Number: BMGO 12-12 A5 Project Title:		