
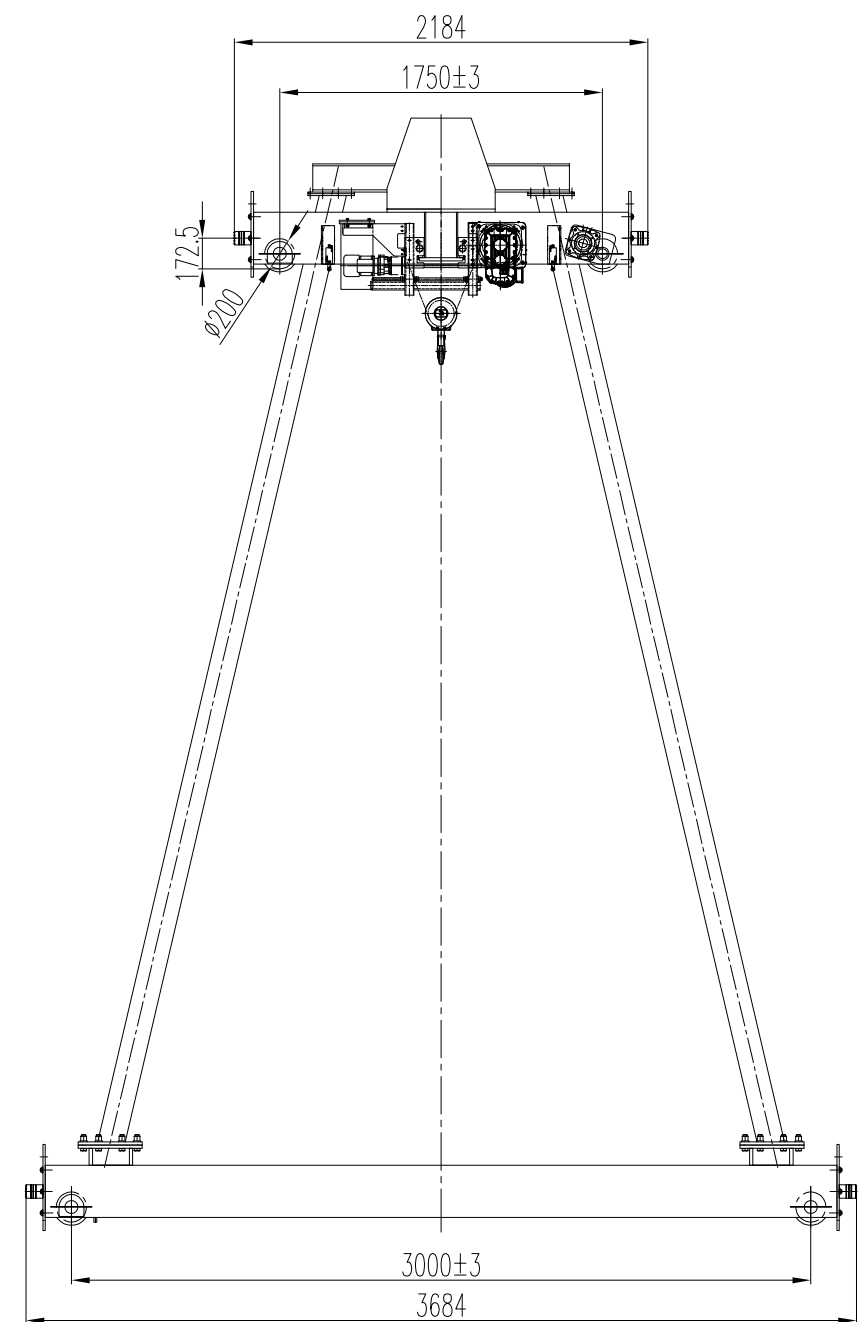


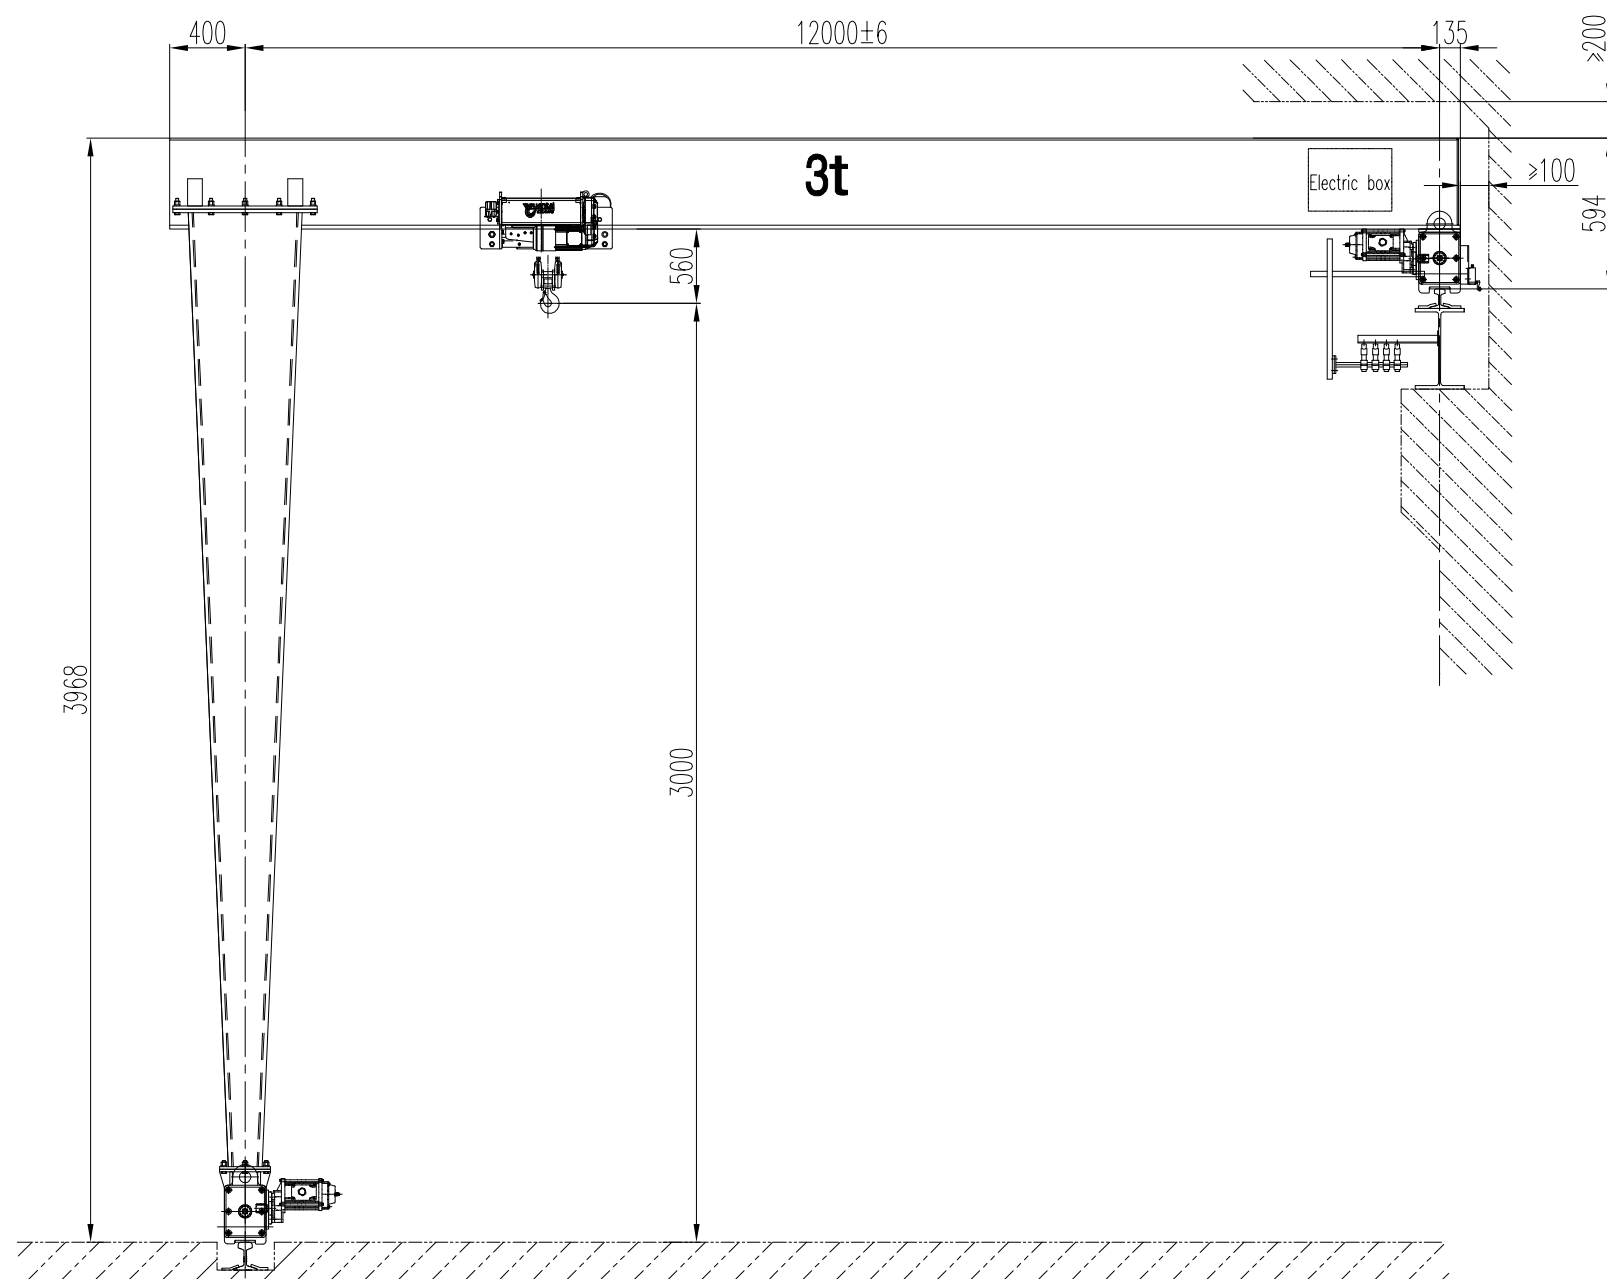

Technical Parameters					
Crane Travelling			Electric Hoist		
Span (m)		12	Type		European spec hoist 3t
Travelling Speed (m/min)		2.0~20	Lifting Speed (m/min)		0.8~5.0
Buffer Stroke (mm)		60	Lifting Height (m)		3.0
Max. Wheel Load (kN)		29.6	Lifting Motor	Type	NR
Rail Type		P15(Recommending)		Power (kW)	3.2kW
Wheel Diameter (mm)		4*Ø200	Travelling Speed (m/min)		2.0~20
Crane Travelling Motor	Type	SZW-050	Trolley Travelling Motor	Type	NR
	Power (kW)	2*0.4kW		Power (kW)	0.4kW
	Rotation Speed (r/min)	1450	Power Supply		
Crane Travelling Reducer	Type	SZW			
	Ratio	58.8			
			3P 380V 50Hz		

Note:

- Distance from workshop backspin to crane peak should $\geq 200\text{mm}$
- Control mode: pendant control & remote control

						BMHO Single Girder Semi-gantry Crane	 Yuantai Crane Machinery					
							Sheet 1 of 1		Weight		Scale	
							Edition				3.2t	Not In Scale
Amended Mark	Qty	Zone	Amended file	Signature	Date							
Designed by			Standardized by			General layout	Drawing Number: BMH03-12 A5					
Drawn by			Electrical Designer				Project Title:					
Checked by			Reviewed by									
Quality Assurance			Approved by									